PREMIER®

Self-Cleaning™ Residential Electric Water Heaters

10-Year Tank Warranty • **10-Year** Parts Warranty

Our most efficient residential electric water heaters – 3" thick CFC-free foam insulation, Silencer™ heat trap nipples and other features combine to produce .94-.95 energy factor for maximum savings on operating costs.

Self-Cleaning Turbo Coil Dip Tube – features jet ports that direct incoming cold water to create turbulence that reduces sediment buildup in the tank. This Self-Cleaning action helps prolong tank life and maintain high energy-efficiency.

NEW Blue Diamond™ Glass Coating – Provides ultimate protection... over twice the corrosion resistance compared to industry-standard glass lining.

Sandhog Low-watt density Incoloy steel upper and lower heating elements – designed to operate more efficiently and last 2-3 times longer than standard copper heating elements.

Long-Lasting PEXAN™ Dip Tube – Like all State residential water heater dip tubes, the Turbo Coil is made of PEXAN, a cross-link PEX polymer that can withstand long-term exposure to water temperatures up to 400° F.

Magnesium Anode Rod – helps protect against corrosion for longer life.

Durable Tamper-Resistant Brass Drain Valve.

Factory-Installed Side-Mounted Temperature & Pressure (T&P) Relief Valve.

Code Compliance – All models meet or exceed federal minimum energy standards effective January 20, 2004, according to latest editions of the National Appliance Energy Conservation Act (NAECA). They also comply with the latest editions of the B.O.C.A. National Codes, C.E.C., U.B.C., S.B.C.C., C.A.B.O. and the H.U.D. standards. All models U.L. Listed according to safety specifications outlined in Underwriters' Laboratories, Inc. Standards for Safety (U.L. 174).

UL® LISTED

For Additional Technical Information,
PHONE 800-365-0024

STATE WATER HEATERS
500 Lindahl Parkway, Ashland City, TN 37015
www.statewaterheaters.com

state WATER HEATERS
The Expert's Choice®

PREMIER®

Self-Cleaning™ Residential Electric Water Heaters

10-Year Tank Warranty • **10-Year** Parts Warranty

MODEL NUMBER	PEAK DEMAND OUTPUT (1st Hour Rating Gallons	ENERGY FACTOR	GAL. CAP.	ELEMENT WATTAGE 240 VAC		RECOVERY 90°F RISE	R VALUE	DIMENSIONS IN INCHES			APPROX. SHIPPING WEIGHT (LBS.)
				STANDARD	MAXIMUM			A HEIGHT	B DIAMETER	C	
TALL MODELS											
EPX 40 DXRT	56	.95	40	4500	5500	21	24	60-1/2	20	53-1/2	125
EPX 52 DXRT	60	.95	50	4500	5500	21	24	57	22-1/2	47-1/2	140
EPX 66 DXRT	72	.95	66	4500	5500	21	24	62	24	53	185
EPX 80 DXRT	81	.94	80	4500	5500	21	24	62	26	52	225
MEDIUM MODELS											
EPX 40 DXRS	52	.95	40	4500	5500	21	24	47	22-1/2	37-3/4	125
EPX 50 DXRS	62	.95	50	4500	5500	21	24	50	24	40-1/2	155

Recoveries are rounded to nearest gallon
Water Connections – 3/4" male NPT on all models
Top-mount T&P Valve not available

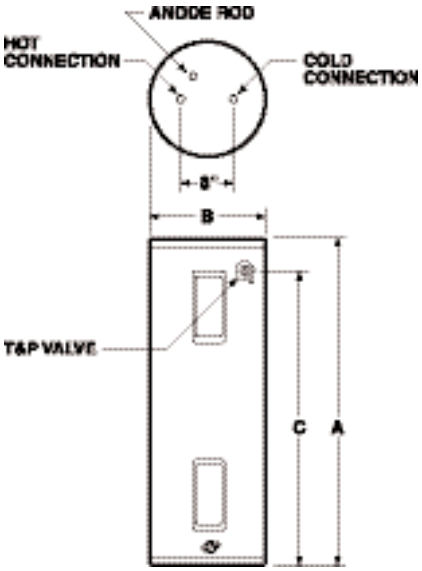

For complete information on limited warranties, consult written warranty, or contact the State Customer Care Center, 1-800-365-0024.

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For Additional Technical Information,
PHONE 800-365-0024

STATE WATER HEATERS
500 Lindahl Parkway, Ashland City, TN 37015
www.statewaterheaters.com

state WATER HEATERS
The Expert's Choice®

SPE-1-04 SWHR-102723-15M-MSI-0104

© 2004 State Water Heaters

Printed in U.S.A.