

A.O. Smith

Residential Electric Water Heaters

Energy Saver

MANUFACTURED HOUSING

ENERGY SAVER FEATURES

COMPLIES WITH HUD STANDARDS FOR MANUFACTURED HOUSING INSTALLATION

Also complies with National Appliance Energy Conservation Act (NAECA) energy-efficiency standards effective January 20, 2004.

SIDE-MOUNTED 3/4" COLD WATER INLET AND HOT WATER OUTLET

For ease of installation when cold water supply originates below the structure.

SIDE-MOUNTED ELECTRICAL JUNCTION BOX

For ease of installation.

5-YEAR LIMITED WARRANTY ON TANK

1-YEAR LIMITED WARRANTY ON PARTS

TWO 3800-WATT HEATING ELEMENTS ON 30, 40 AND 50 GALLON MODELS

One 1650-watt element on 20-gallon model.

GLASS-LINED TANK

For long-lasting protection against rust and corrosion.

ANODE ROD

Helps protect against rust and corrosion for long life.

FACTORY-INSTALLED TEMPERATURE & PRESSURE (T&P) RELIEF VALVE

MAXIMUM HYDROSTATIC WORKING PRESSURE 150 PSI

UL LISTED

Complies with Underwriters Laboratories Inc. Standard of Safety – UL 174.



A.O. Smith



Water Heaters

www.aosmithwaterheaters.com

Energy Saver

MANUFACTURED HOUSING

MODEL NUMBER	FIRST HOUR RATING GALLONS	ENERGY FACTOR	GALLON CAPACITY	STD. VOLTAGE/WATTAGE	RECOVERY 90°F RISE GALLONS	R VALUE	DIMENSIONS IN INCHES			APPROX. SHIPPING WEIGHT (LBS.)
							A	B	C	
ESM-20	-	-	19.9	120V, 1650 Watts	8	12	34	26-1/2	17	76
ESM-30	43	.93	30	240V, 3800 Watts	17	16	37-1/2	28-1/2	20-1/2	90
ESM-40	51	.92	40	240V, 3800 Watts	17	16	46	38-1/4	20-1/2	115
ESM-50	58	.90	50	240V, 3800 Watts	17	16	56	47-3/4	20-1/2	140

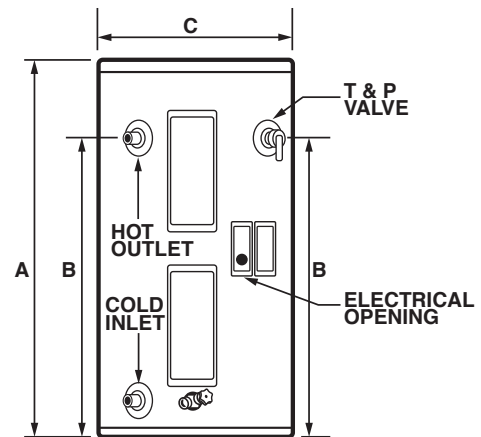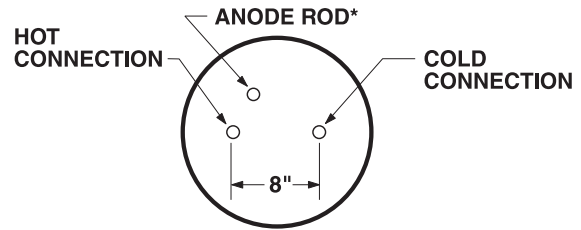

A.O. Smith
Water Heaters

www.aosmithwaterheaters.com

500 Lindahl Parkway, Ashland City, TN 37015

For Technical Information and Automated Fax Service, call 800-527-1953.
A.O. Smith Corporation reserves the right to make product changes or improvements without prior notice.